



ARCHERY

BUILT THE **BEST**. BY THE **BEST**. FOR THE **BEST**.



A BACK-TENSION RELEASE FEATURING OUR FLEX CONNECTOR BUCKLE STRAP.

THE RANGER ALLOWS THE HINGE-STYLE RELEASE TO BE USED IN ALL TYPES OF BOWHUNTING OR COMPETITIVE ARCHERY. PART OF OUR CONSTRUCTOR LINE, IT HAS THE SAME MICRO-ADJUST FEATURES AS THE COOP — AND A WIDE-TRACK ALUMINUM THREE-FINGER HANDLE THAT DELIVERS CONSISTENT COMFORT AND CONTROL.

COMPLETE INSTRUCTIONS INCLUDED INSIDE PACKAGE. *PATENT PENDING.
OPTIONAL MOON SETTING - CLICK OR NO-CLICK.



101 TUG BRANCH ROAD
CLAY CITY, KY / 40312

B3ARCHERY.COM
606.612.5215



ARCHERY

BUILT THE **BEST**. BY THE **BEST**. FOR THE **BEST**.

**FLEX
CONNECTOR[®]
BUCKLE STRAP**



**INTEGRATED
THUMB PEG
MICRO-ADJUST
MOON**



RELEASES • BROADHEADS • SIGHTS

Adjustment Instructions


Travel Adjustment

1. LOOSEN THE TWO 5-40 X 1/16 SET SCREWS LOCATED ON BOTH SIDES OF THE RELEASE HANDLE (FIG. 1).
2. ROTATE THE MOON TO MAKE THE RELEASE HEAVIER OR LIGHTER. UTILIZING THE DETENTS ON SIDE OF MOON FOR MICRO-ADJUSTING.
3. WHEN CHANGING THE MOON TO CLICK OR NO CLICK, ALWAYS LOOSEN THE **5-40 X 1/16 SET SCREWS** (FIG. 1) **FIRST**.
4. NEXT, USE A FLATHEAD SCREWDRIVER TO BACK THE THREADED SCREW (FIG. 2) OUT OF THE MOON AND HANDLE.
5. FLIP THE MOON TO YOUR DESIRED SIDE AND REINSTALL YOUR SCREW (FIG. 2) THROUGH THE BRACKET, HANDLE AND MOON UNTIL IT BOTTOMS OUT. **DO NOT OVERTIGHTEN.**
6. SET THE MOON TO DESIRED LOCATION FOR TRAVEL AND LOCK DOWN THE SET SCREWS. (FIG. 1)
THESE TWO SET SCREWS SHOULD ALWAYS BE TIGHTENED LAST.

Flex Connector Length Adjustment

- Patent Pending

1. LOOSEN 1/4 - 28 X 1/4 CONE PT SET SCREW, WHICH IS LOCATED ON THE CENTER OF THE METAL STRAP BRACKET SEWN INTO THE RELEASE STRAP.
2. SLIDE THE FLEX CONNECTOR TO YOUR DESIRED LENGTH AND RE-TIGHTEN THE SET SCREW. KEEP SAFTY KNOT IN EXCESS NYLON.
PLEASE TEST AFTER ANY ADJUSTMENT.

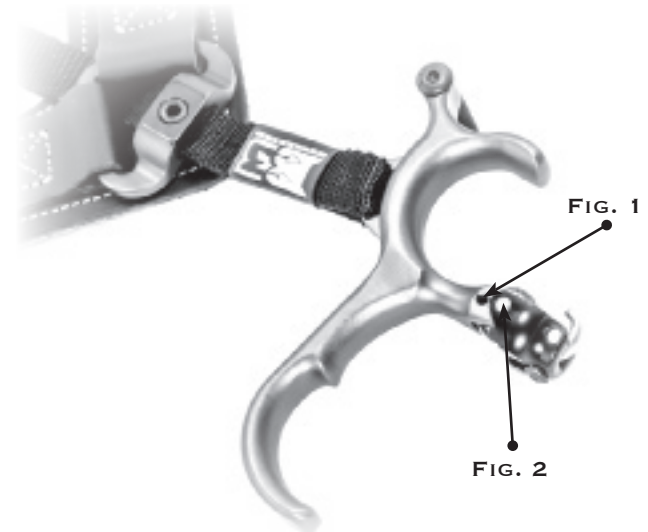

101 TUG BRANCH ROAD / CLAY CITY, KY / 40312
B3ARCHERY.COM / 606.612.5215